


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

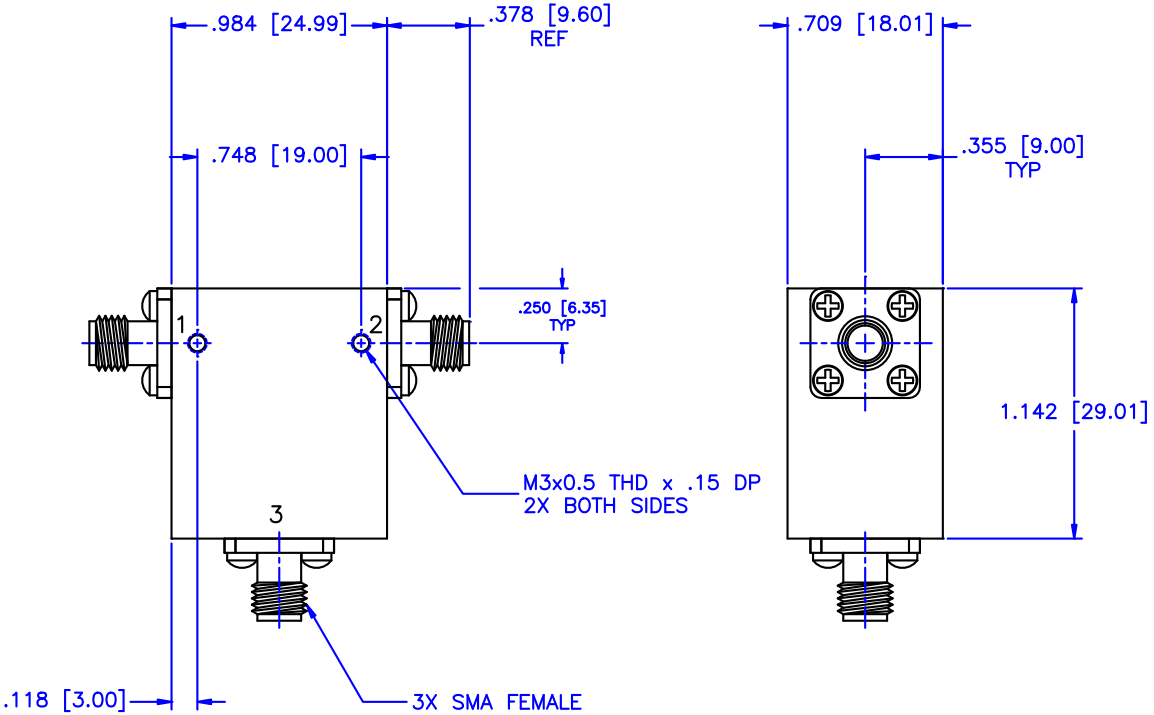

SPECIFICATIONS:

- Frequency Range: 4–8 GHz
- Isolation: 21dB Min.
- Insertion loss: 0.50dB Max.
- VSWR: 1.35:1 Max.
- Operating Temperature: –30°C to +70°C
- Power Avg: 25 Watts
- Power Peak: 250 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-06-2002	DRAWING TITLE: COAXIAL CIRCULATOR		
APPROVED: T. Nguyen		DATE: 03-06-2002	PART NO. CS-19		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: A	DWG NO. 81543
		DO NOT SCALE THE DRAWING			